

**Featuring ScaleX® for Optimal Scale and Corrosion Protection.**

## Impact On Business

- Enhance beverage appearance and taste.
- Ice Machine operates efficiently—requires minimal maintenance.
- Add years to equipment life.

## Value

- Increase beverage sales and profit.
- Less hassle and expense due to downtime and unscheduled service.
- Reduce the cause of 70% of service related problems.

## Performance

- ScaleX out performs all other filter media to provide superior protection against corrosion and scale formation<sup>1</sup>.
- Reduce Chlorine and off-taste and odor.
- Remove dirt and sediment particles that can clog solenoids and damage pumps.

*Optipure combines the latest advances in filtration media technology with over 25 years experience to meet real-world filtration needs. We guarantee measurable results that will have a positive impact on your success.*

**Compare the Performance . .  
 . . Measure the Difference**



### FXS-21, FXCS-21

Application Guide	
<b>Cubers</b>	to 450 lbs / day
<b>Flakers</b>	to 750 lbs / day

- Tested and Certified by NSF International.



### FXS-22, FXCS-22

Application Guide	
<b>Cubers</b>	to 800 lbs / day
<b>Flakers</b>	to 1500 lbs / day

- Tested and Certified by NSF International.



### FXS-32, FXCS-32

Application Guide	
<b>Cubers</b>	to 1600 lbs / day
<b>Flakers</b>	to 3000 lbs / day

- Tested and Certified by NSF International.



### FXS-32H, FXCS-32H

Application Guide	
<b>Cubers</b>	over 1600 lbs / day
<b>Flakers</b>	N / A

- Tested and Certified by NSF International.



### FXS-32D, FXCS-32D

Application Guide	
<b>Cubers</b>	to 1200 lbs / day*
<b>Flakers</b>	to 2000 lbs / day*

- \* Dual System for "stacked" or "paired" cubers or flakers. Capacity shown is for each ice machine.



Where indicated, products are Tested and Certified by NSF International. Refer to the Performance Data Sheet available for each system for Certification Information. Performance data sheets are available on our website, [www.optipurewater.com](http://www.optipurewater.com).


<sup>1</sup>ScaleX scale and corrosion inhibitor technology tested & verified by independent laboratory testing.

# Ice Machines



**ScaleX<sup>®</sup> Advanced Protection**

## System Features

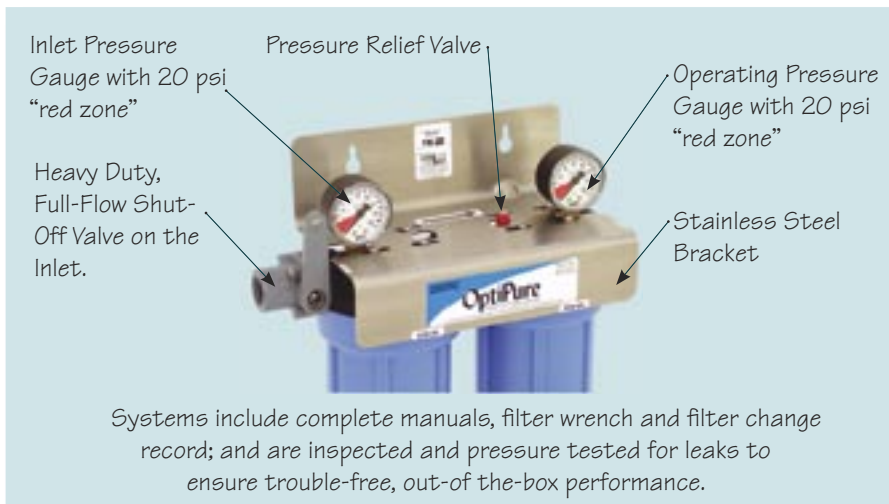

## Warranty Information

Systems have a three year warranty against defects in materials and workmanship. For complete warranty information refer to the warranty statement included with each system.

## System Application Data

Model	FXS-21	FXS-22	FXS-32	FXS-32H	FXS-32D
<b>Models with fine filtration</b>	<b>FXCS-21</b>	<b>FXCS-22</b>	<b>FXCS-32</b>	<b>FXCS-32H</b>	<b>FXCS-32D</b>
<b>Cubers (capacity lbs/day)</b>	to 450	to 800	to 1,600	over 1,600	(2) to 1,200 ea.
<b>Flakers (capacity lbs/day)</b>	to 750	to 1,500	to 3,000	N/A	(2) to 2,000 ea.
<b>Capacity in gallons-FXS (liters)</b>	15,000 (56,700)	30,000 (113,400)	30,000 (113,400)	60,000 (226,800)	60,000 (226,800)
<b>Capacity in gallons-FXCS (liters)</b>	18,000 (68,040)	36,000 (136,080)	36,000 (136,080)	72,000 (272,160)	72,000 (272,160)
<b>Service Flow Rate</b>	1.5 gpm (5.7 lpm)	3 gpm (11.3 lpm)	3 gpm (11.3 lpm)	3 gpm (11.3 lpm)	6 gpm (22.7 lpm)
<b>Dimensions (Height x Width x Depth, inches)</b>	14.5 x 11.5 x 5	25 x 11.5 x 5	26.5 x 16.5 x 5	26.5 x 16.5 x 5 & (1) 25 x 4.5 x 5	25 x 18.3 x 5.75 & (2) 25 x 4.5 x 5
<b>Connection - Inlet &amp; Outlet</b>	1/2" NPTF (Female)			3/4" NPTF	
<b>Pressure Range</b>	10-125 psi (0.7-8.6 bar)				
<b>Temperature Range</b>	35°-100°F (2° - 38°C)				
<b>Particulate Reduction-FXS</b>	Greater than 98% @ 5 micron				
<b>Particulate Reduction-FXCS</b>	Tested and Verified by Independent Laboratory @ 0.5 micron.				


## Replacement Cartridges, FXS

Model	Cartridge	Item #
<b>FXS-21</b>	(1) CTO-10	252-20110
	(1) SCLX-10	252-30010
<b>FXS-22</b>	(1) CTO-20	252-20120
	(1) SCLX-20	252-30020
<b>FXS-32</b>	(1) CTO-20	252-20120
	(2) SCLX-20	252-30020
<b>FXS-32H</b>	(2) CTO-20	252-20120
	(2) SCLX-20	252-30020
<b>FXS-32D</b>	(2) CTO-20	252-20120
	(3) SCLX-20	252-30020


## Replacement Cartridges, FXCS

Model	Cartridge	Item #
<b>FXCS-21</b>	(1) XTO-10	252-20130
	(1) SCLX-10	252-30010
<b>FXCS-22</b>	(1) XTO-20	252-20140
	(1) SCLX-20	252-30020
<b>FXCS-32</b>	(1) XTO-20	252-20140
	(2) SCLX-20	252-30020
<b>FXCS-32H</b>	(2) XTO-20	252-20140
	(2) SCLX-20	252-30020
<b>FXCS-32D</b>	(2) XTO-20	252-20140
	(3) SCLX-20	252-30020

## The ScaleX<sup>™</sup> Advantage

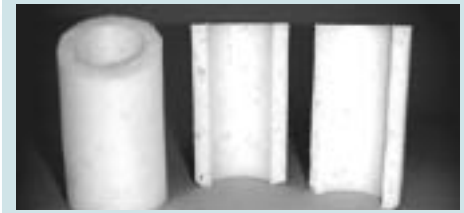

**Poly-Matrix Construction.** Siliphos granules are embedded in a unique, porous plastic structure. This construction provides controlled, consistent release of siliphos into the water.

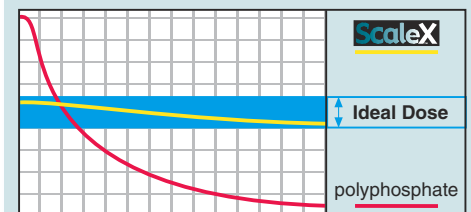

**Controlled dosing, superior protection.**

ScaleX's controlled release design provides consistent, long-term dosing. Typical polyphosphate filters overdose when new, then quickly swing to underdosing, leaving equipment unprotected. ScaleX provides consistent protection, month after month.

## The OptiPure<sup>™</sup> Advantage



**Advanced media for longest service life.**

All OptiPure systems utilize the latest, highest capacity media. Typical service life is 6 months between filter changes.

## OptiPure Dealer:

Manufactured by FilterXpress a division of Procam Controls Inc.  
2605 Technology Dr. Bldg 300 Plano, TX 75074 (972) 881-9797 FAX (972) 422-6262  
[www.optipurewater.com](http://www.optipurewater.com)

© 2004 FilterXpress Form # LITFXSCLX0104